

PRODUCT DATASHEET

DOWNLIGHTS | SPOTLIGHTS-PAINTABLE PLASTER LIGHT

Downlights | Recessed mounted spotlight | 6w | Square shape Code# GW07027-6



Areas of Application

- Shops
- Villa
- Hotel
- Club
- Corridors, stairways, entrance areas
- Galleries, museums residential interiors

Product Features

sales@vivisomaled.com

- Module structure, separate embedded installation, adapted to different LED light source and beam angles
- The height of the embedded parts can be adjusted
- Energy savings of up to 90% compared to halogen lamp spotlights
- High luminous efficacy, high CRI
- CCT optional and dimmable
- Uniform light output and good consistency
- Without flicker, anti glare

Complete Product Data

Code#	GW07027-6	
Wattage	6w	
Installation Type	Recessed	
Dimension	L350mm*W350mm*H55mm	
Cutout	355mm*355mm	
IP Rating	IP20	
Luminous Flux	300lm	
Beam Angle	/	
Working Temperature	-25℃ ~55℃	
Certificates	/	
Warranty	3 Years	
Packing Size	/	

Driver Data

Driver Brand	Tridonic, Osram, Philips, Lifud, Euchips, Eaglerise, etc.
Input Voltage	100-250VAC 50/60hz
Output Voltage	30-42Vdc
Output Current	150mA
Power Factor	>0.5 as standard; >0.9 optional
Efficiently	87% @230v
IP Rating	IP20
Dimmable	Non-Dimmable/Triac/0-10v/Dali Optional
Free Flicker	Yes
Certificates	CE, CB, CCC, ENEC
Warranty	3/5 Years

Material&Housing Data


Housing Color	White
Reflector Color	White
Housing Material	Gypsum

Photometric Data

LED chip brand	Cree/ Osram /Bridgelux/ Epistar etc.
Chip Type	LED strip
Color Temperature	2700K, 3000K, 4000K, 5000K, 6000K
CRI	>80, >90
Life time	>50000Hrs
Lumens efficacy	100-120lm/w

Dimensions&Installation



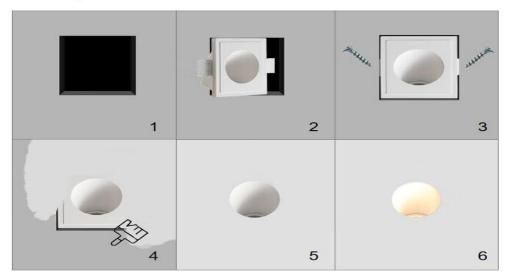

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the downlight.

- 1. Make sure the power is turned off in which you are installing the products.
- 2. Open the hole in the wall according to the lamp size. (Fig 1)
- 3. Put the embedded parts of lamps into back side, pay attention to pull the wire out. (Fig 2)
- 4. The self-tapping screw goes through the wall and locks the embedded wings of the lamp. (Fig 3)
- 5. The edge of embedded parts is gray until the edge smooth with wall. (Fig 4)
- 6. Light source module of lamps and lanterns, after being connected to the mains supply push the module into the embedded part. (Fig 5)
- 7. Install the fixed card, and the installation is complete electric test light. (Fig 6)