

PRODUCT DATASHEET

TRACKLIGHTS | LOW VOLTAGE TRACK

Tracklights | Surface mounted spotlight | 36w | Square shape
Code# MT0400120-36



Areas of Application

- Shops
- Villa
- Hotel
- Club
- Corridors, stairways, entrance areas
- Galleries, museums residential interiors

Product Features

- High luminous efficacy, high CRI
- Energy savings of up to 90% compared to halogen lamp spotlights
- CCT optional and dimmable
- Die-cast aluminum housing, ensure excellent heat dissipation
- Uniform light output and good consistency, without flicker
- Basic lighting module, used in conjunction with magnetic track
- Magnetic installation, safe voltage, free sliding
- The grille design is anti-glare and dust-proof

Complete Product Data

Code#	MT0400120-36
Wattage	36w
Installation Type	Surface
Dimension	653mm*22mm*44mm
Cutout	/
IP Rating	IP20
Luminous Flux	3060lm
Beam Angle	24°
Working Temperature	-25°C ~55°C
Certificates	/
Warranty	3 Years
Packing Size	/

Driver Data

Driver Brand	Tridonic, Osram, Philips, Lifud, Euchips, Eaglerise, etc.
Input Voltage	DC48V
Output Voltage	/
Output Current	/
Power Factor	>0.5 as standard; >0.9 optional
Efficiently	87% @230v
IP Rating	IP20
Dimmable	Non-Dimmable/Triac/0-10v/Dali Optional
Free Flicker	Yes
Certificates	CE, CB, CCC, ENEC
Warranty	3/5 Years


Material&Housing Data

Housing Color	Black
Reflector Color	Black
Housing Material	Aluminum

Photometric Data


LED chip brand	Cree/ Osram /Bridgelux/ Epistar etc.
Chip Type	COB
Color Temperature	3000K, 4000K, 6000K
CRI	>90
Life time	>50000Hrs
Lumens efficacy	100-120lm/w

Dimensions&Installation

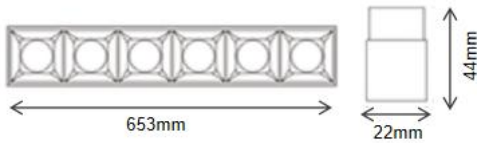


PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the tracklight, make sure the power is turned off in which you are installing the products.

Method A: Embedded installation

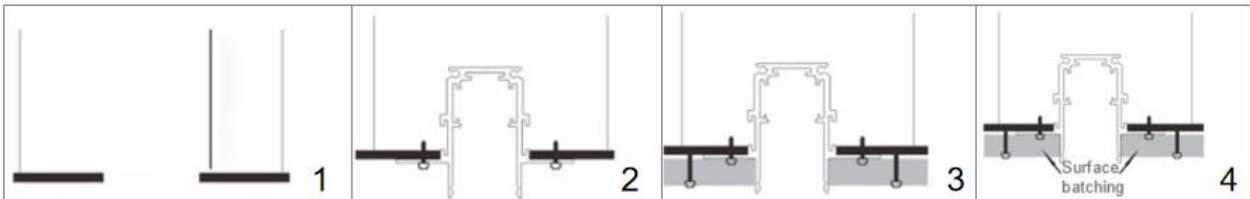

1. Make a hole on the fixed plate, the fixed plate must be able to bear the weight. (Fig 1)
2. Place the track into the slot and lock the track to the ceiling with M4 tapping screws. (Fig 2)
3. Install the gypsum board on the track and block the wings of the track. (Fig 3)
4. Plaster on the covering net until the gap between the outer plate and the guide rail is completely covered. (Fig 4)
5. Connect the input terminal to the main power supply, and put the track light into the track bar.
6. Restore power at the source and the installation is complete.

Method B: Recessed installation

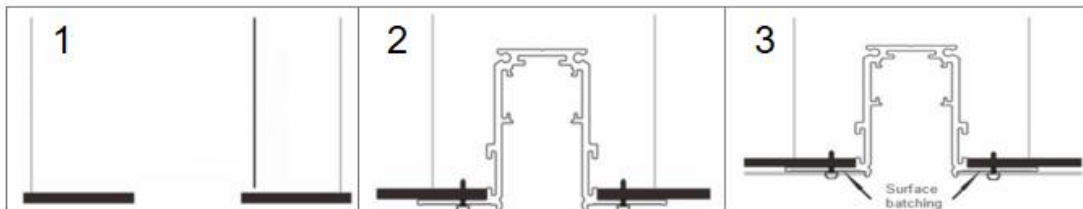

1. Make a hole on the fixed plate, the fixed plate must be able to bear the weight. (Fig 1)
2. Place the track into the slot and lock the track to the ceiling with M4 tapping screws. (Fig 2)
3. Plaster on the track surface, covering the exposed wing as show. (Fig 3)
4. Connect the input terminal to the main power supply, and put the track light into the track bar.
5. Restore power at the source and the installation is complete.

Method C: Surface ceiling / Pendant installation

1. Ceiling type, using screws to fix the track on the ceiling. (Fig 1)
2. Pendant type, use the accessories in the lifting bag to lift the track. (Fig 2)

