

PRODUCT DATASHEET

OUTDOOR LIGHTING | OUTDOOR- UNDERWATER

Outdoor lighting | Recessed mounted underwater light | 16w | Round shape
Code# OTUW17011-16RGBW



Areas of Application

- Swimming pool
- Fountains
- Aquariums
- Waterscape sculpture
- Waterfalls
- Rivers

Product Features

- IP68 waterproof
- High luminous efficacy, high CRI
- Uniform light output and good consistency, without flicker
- Anti-oxidation, anti-corrosion
- High efficient LED chips for RGBW light
- CCT optional and dimmable
- Easy and quick installation
- Good heat dissipation

Complete Product Data

Code#	OTUW17011-16RGBW
Wattage	16w
Installation Type	Recessed
Dimension	φ115mm*77mm*142mm
Cutout	/
IP Rating	IP68
IK Rate	IK08
Luminous Flux	/
Beam Angle	8°, 12°, 25°, 30°, 45°, 60°
Working Temperature	-25°C ~55°C
Certificates	/
Warranty	3 Years
Packing Size	/

Driver Data

Driver Brand	Tridonic, Osram, Philips, Lifud, Euchips, Eaglerise, etc.
Input Voltage	DC24V
Output Voltage	/
Output Current	/
Power Factor	>0.5 as standard; >0.9 optional
Efficiently	87% @230v
IP Rating	IP20
Dimmable	Non-Dimmable/Triac/0-10v/Dali Optional
Free Flicker	Yes
Certificates	CE, CB, CCC, ENEC
Warranty	3/5 Years



Material&Housing Data

Housing Color	Silver
Reflector Color	/
Housing Material	316 stainless steel +tempered glass

Photometric Data

LED chip brand	Cree/ Osram /Bridgelux/ Epistar etc.
Chip Type	SMD
Color Temperature	2700K, 3000K, 4000K, 6000K
CRI	>80
Life time	>50000Hrs
Lumens efficacy	100-120lm/w

Dimensions&Installation

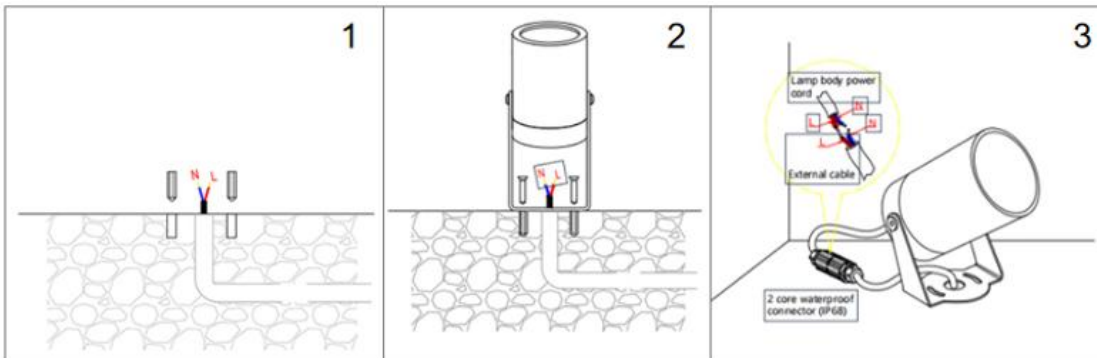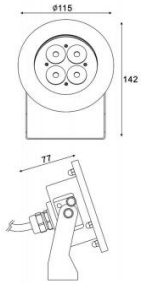

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the underwater light.

1. Make sure the power is turned off in which you are installing the products.
2. Drill holes in the pool according to size, embedded plastic expansion pipe. (fig 1)
3. Use self-tapping screws to fix the lamps. (fig 2)
4. Use 2 core waterproof connector to connect the lamp power cord to the DC24V drive output power cord. (fig 3)
6. Restore power at the source and the installation is complete.